CN-1250-1

STANDARD CAPACITY :

50, 75, 100, 150, 200, 250, 300, 500kg NTEP
635, 1000kg NON-NTEP

RECOMMENDED MAXIMUN PLATFORM SIZE:

600mmX600mm

INTERCHANGEABLE PRODUCTS:

Rice Lake Weighing Systems RL1260
Tedea-Huntleigh.....1260
HBM.....PW16

Main Dimensions and Accessories

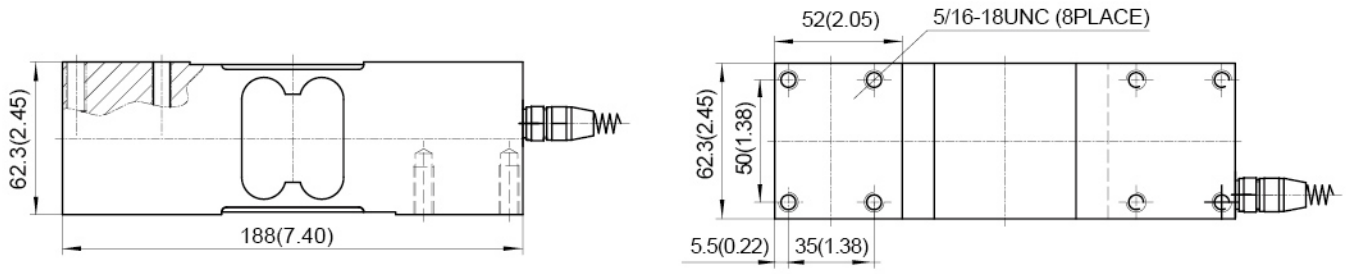

Specifications

Rated output	2.0mV/V±10%	Zero balance	±1%F·S
Accuracy class	0.03 C3	Input resistance	400±15Ω
Non-linearity	0.03%F·S	Output resistance	350±3Ω
Hysteretic	0.03%F·S	Safe overload	150%F·S
Non-repeatability	0.02%F·S	Ultimate overload	300%F·S
Creep in 30 minutes	0.03%F·S	Excitation voltage	10VAC/DC
Temperature effect span	15 PPM /℃ of Applied Load	Maximum excitation voltage	15VAC/DC
Temperature effect zero	26 PPM /℃ of Applied Load	Insulation resistance	>5000MΩ(50V DC)
Compensated temperature range	-10℃~40℃	Environmental protection	IP67
Operating temperature range	-40℃~65℃	Material	Aluminum
Cable color code	RED (+Input) GREEN (+Output) BLACK (-Input) WHITE (-Output) 4 COLOR SHIELD CABLE 10FT (3m)		

All specifications are a maximum as a%(±) of full load,otherwise stated.